

# VO5/24


## radome Omnidirectional Antenna



### Specifications

Type	omnidirectional antenna with radome
Polarization	vertical
Frequency	2400-2485 MHz
Impedance	50 ohm
VSWR	≤1.5:1
Gain	5 dBi
Connector	SMA female
Power handling	20 W
Mount	mounting bracket fits 35-50 mm mast tubes holes for wall mount
Diameter	122 mm
Length	130 mm excl mounting bracket 215 mm incl mounting bracket
Weight	190 g net, 300 g shipping
Material	mounting bracket - stainless steel radome - pvc
Color	white radome
Other	designed for indoor use

Smarteq reserves the right to change specifications without prior notice.

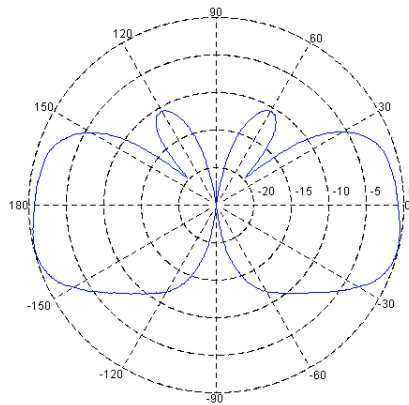

Elevation (E-field) radiation pattern

**SMARTEQ™**  
WIRELESS TELECOM

### Smarteq Wireless AB

P.O. Box 4064 | SE-182 04 Enebyberg | Sweden

[www.smarteq.com](http://www.smarteq.com)

Smarteq's business concept is to use the latest technology to develop products in the field of wireless telecommunications. The business is focused on the development and sale of products for the end market and the OEM market.